

AMI: Polyethylene Films 2021

ANALYSIS & TESTING FOR BETTER PPA MASTERBATCHES

Michael McLaren, Dr. Miao Miao Xiao, Patrick Greenidge

Ingenia Polymers Corp.



Ingenia at a Glance

- Founded in 1986 as WedTech and renamed Ingenia Polymers Corp. in 1998
- Five manufacturing sites: Brantford (Canada), Calgary (Canada), Houston & La Porte (USA), and Al-Jubail (KSA)
- Specialized in Additive and Pigment Masterbatches, Superlink® and Rototuff® rotomoulding compounds, and additive Ingenia Superblends®



PPA Fundamentals


- Polymer Processing Aids – Fluoropolymer (plastic or elastomer)
 - Usually combined with a PEG or PCL synergist
- Coats the metal surfaces of the extruder/die, reducing friction
 - Elimination of melt fracture, reduction of die buildup
 - Better flow = Less material hang-up = Less oxidation & gel formation
- Performance impacted by a wide range of factors:
 - Fluoropolymer structure
 - Delivery method
 - Process equipment & conditions
 - Other additives

Why a Masterbatch?

- Why not direct addition?
 - Particle size critical to PPA performance
 - For fluoroelastomer PPA's, ideal particle size is 2-10 μm
 - Low dosage favors dilute form
- Why not use PPA-loaded resin?
 - PPA requirements structure, process-dependent
 - Allows you to precondition ('shock') your extruder on start-up with extra PPA

Time-to-Clear (TtC) Melt Fracture Testing

- Representative test of PPA performance in film processing
- Measures time from PPA introduction to total elimination of melt fracture
- Time to complete coating depends on:
 - Rate of PPA deposition on die
 - Rate of PPA removal from die

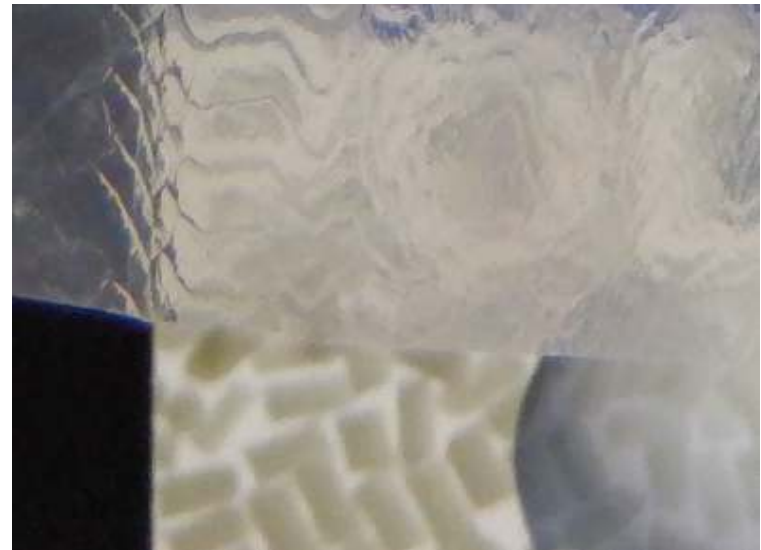

Test Conditions

- Test resin – *b*-LLDPE
 - MI 1.0, 0.918 g/cm³
 - No added antiblock, slip, or PPA
- High shear rate – 300 s⁻¹ apparent*, 390 s⁻¹ actual
- Low shear rate – 170 s⁻¹ apparent*, 225 s⁻¹ actual
- PPA loading increased each hour: 300→600→900 ppm
 - 2% masterbatches, letdown ratio from 1.5 → 4.5%
- 2500 ppm diatomaceous earth, added in a separate masterbatch


*Industry literature typically reports apparent shear rate

Melt Fracture Evaluation


0 minutes

30 minutes


60 minutes

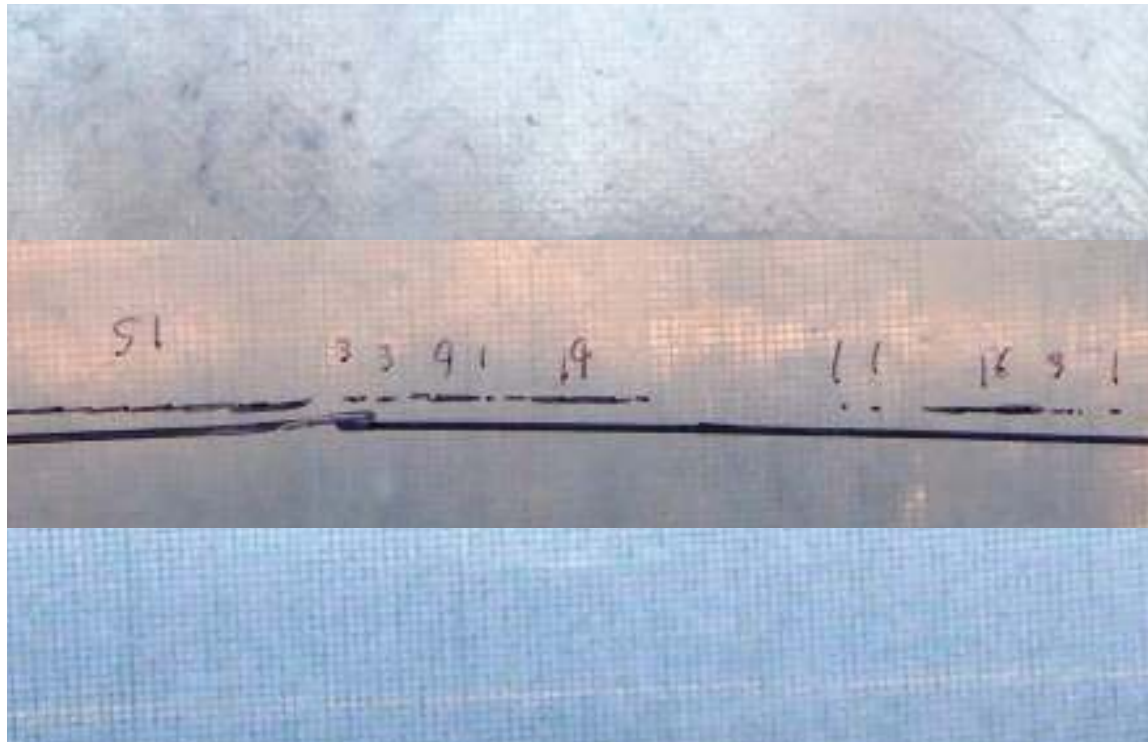

Test Outcomes: Repeatability

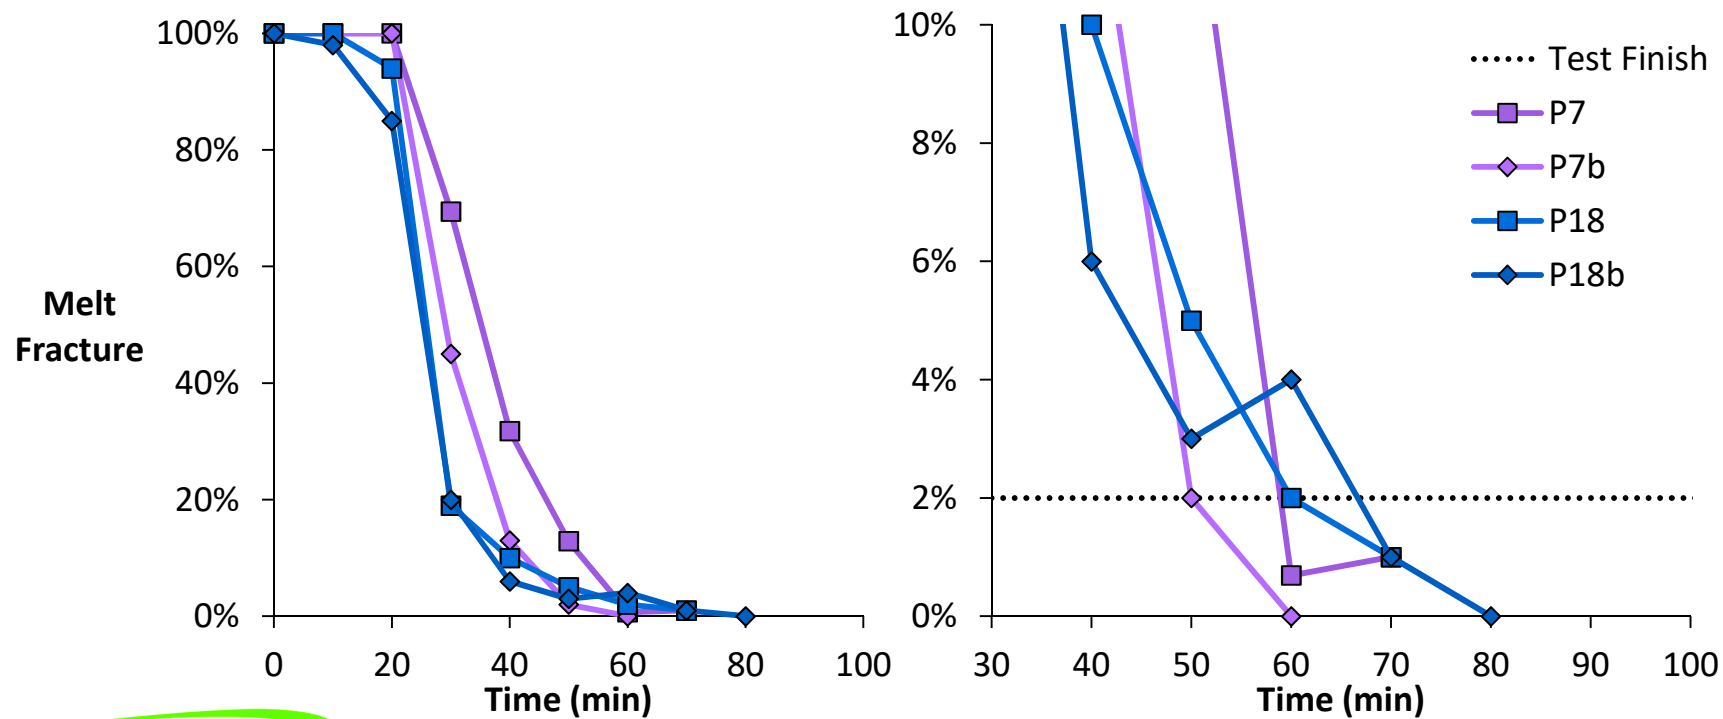


Test Outcomes: Commercial Field

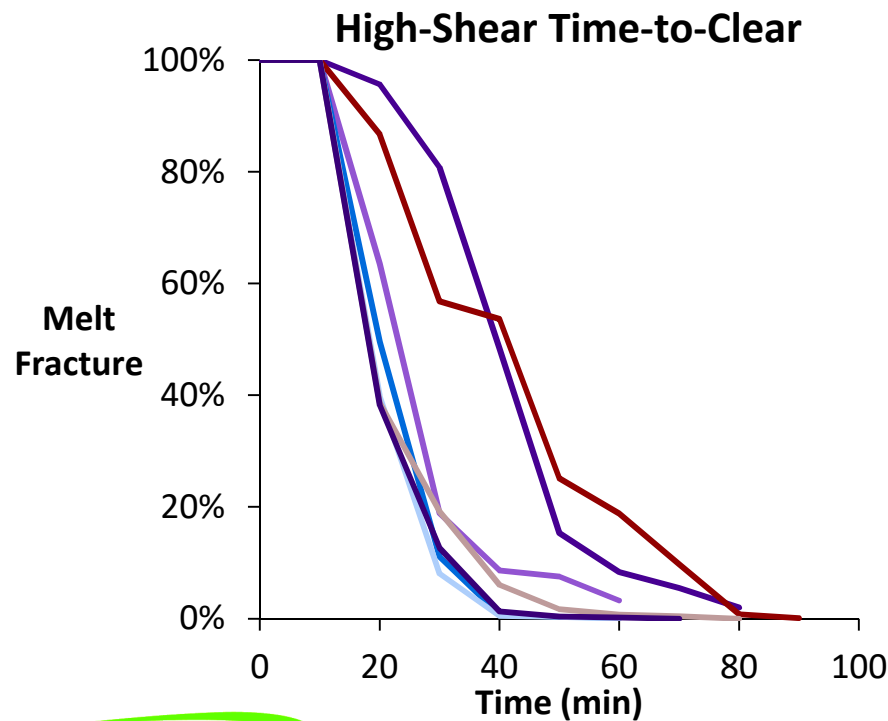


- Commercial PPA's show a range of performance levels
- In our testing, newer grades showed significant reduction in TtC over older products


Test Outcomes: High- vs. Low-Shear Performance

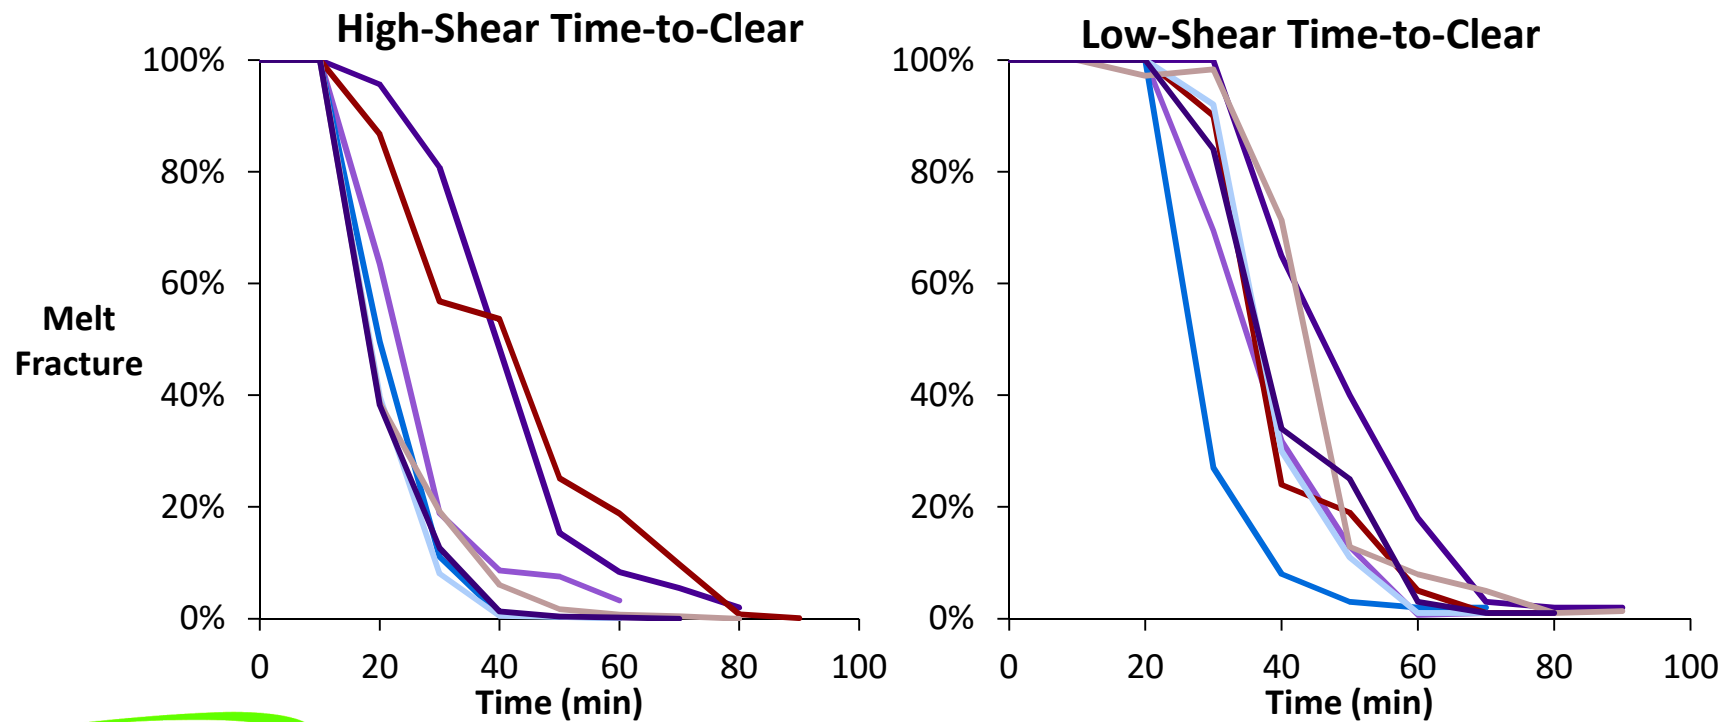

Test Outcomes: PPA Use Level

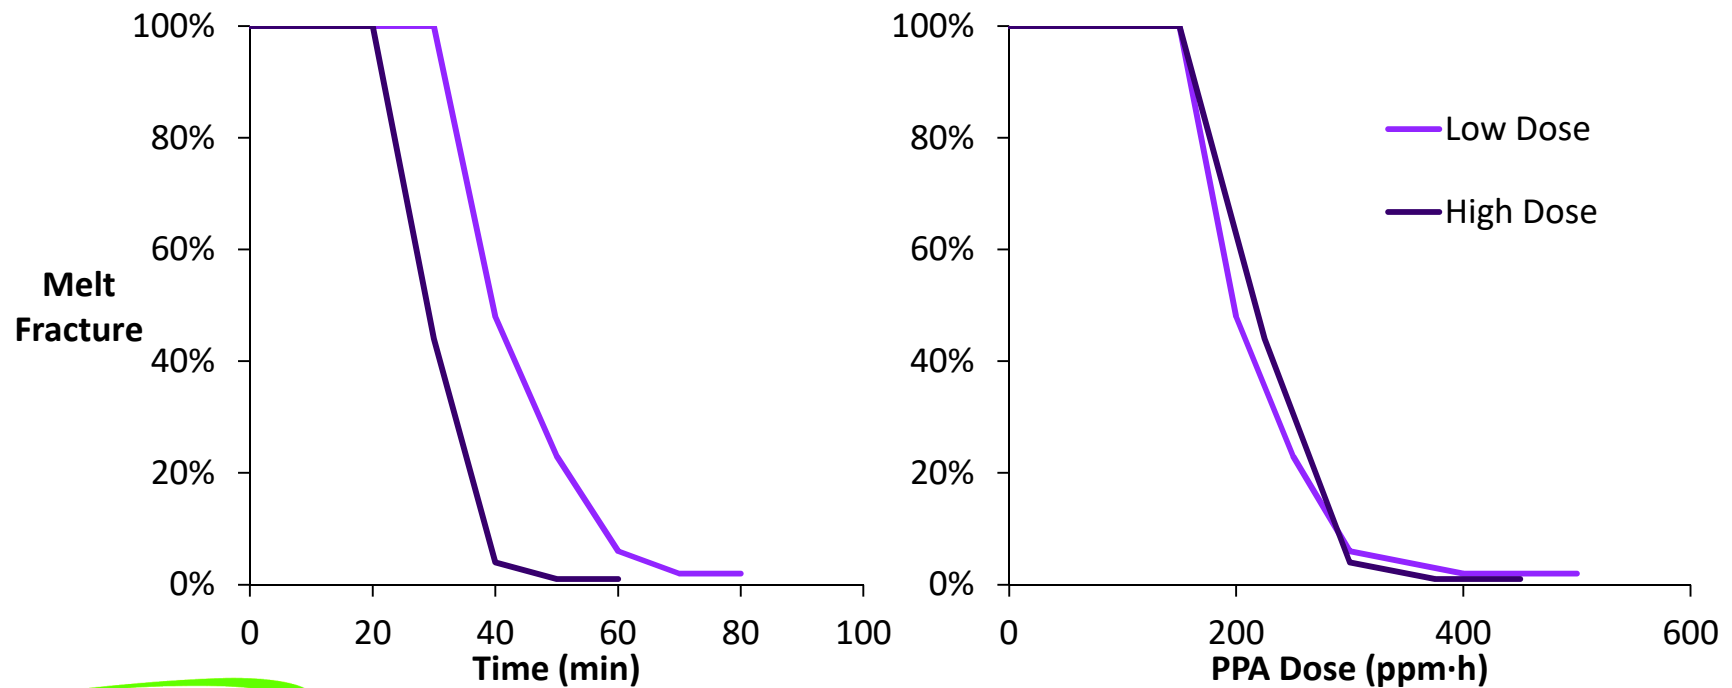

Test Outcomes: Impact of Preparation Techniques

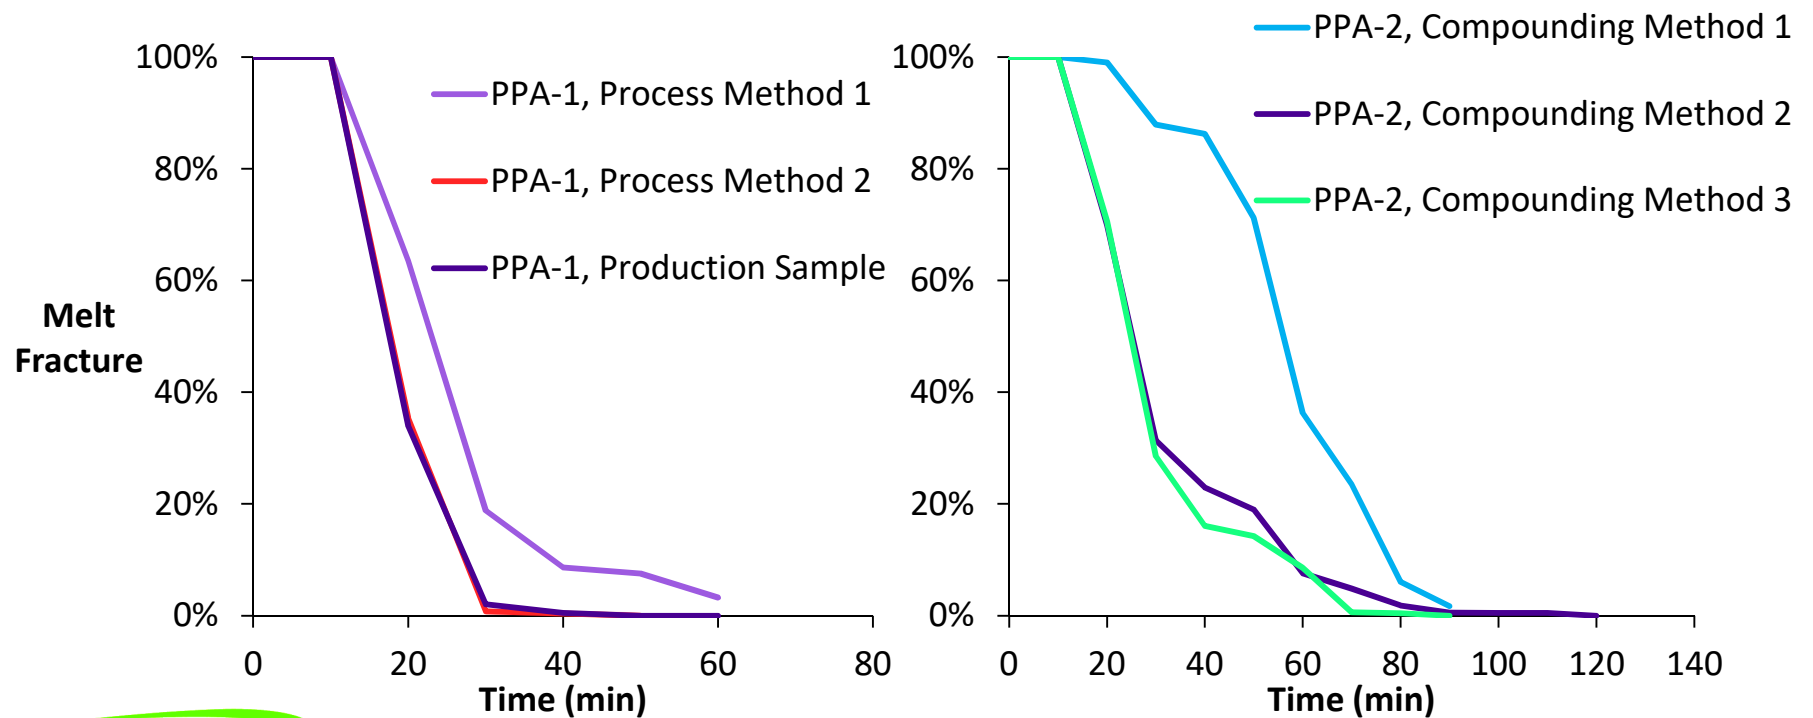

Development Outcomes: New Formulations


ITZ-443

Developed based on new insights into processing & formulation

Designed to match performance of existing PPA's

Better economics

Development Outcomes: Formula Performance

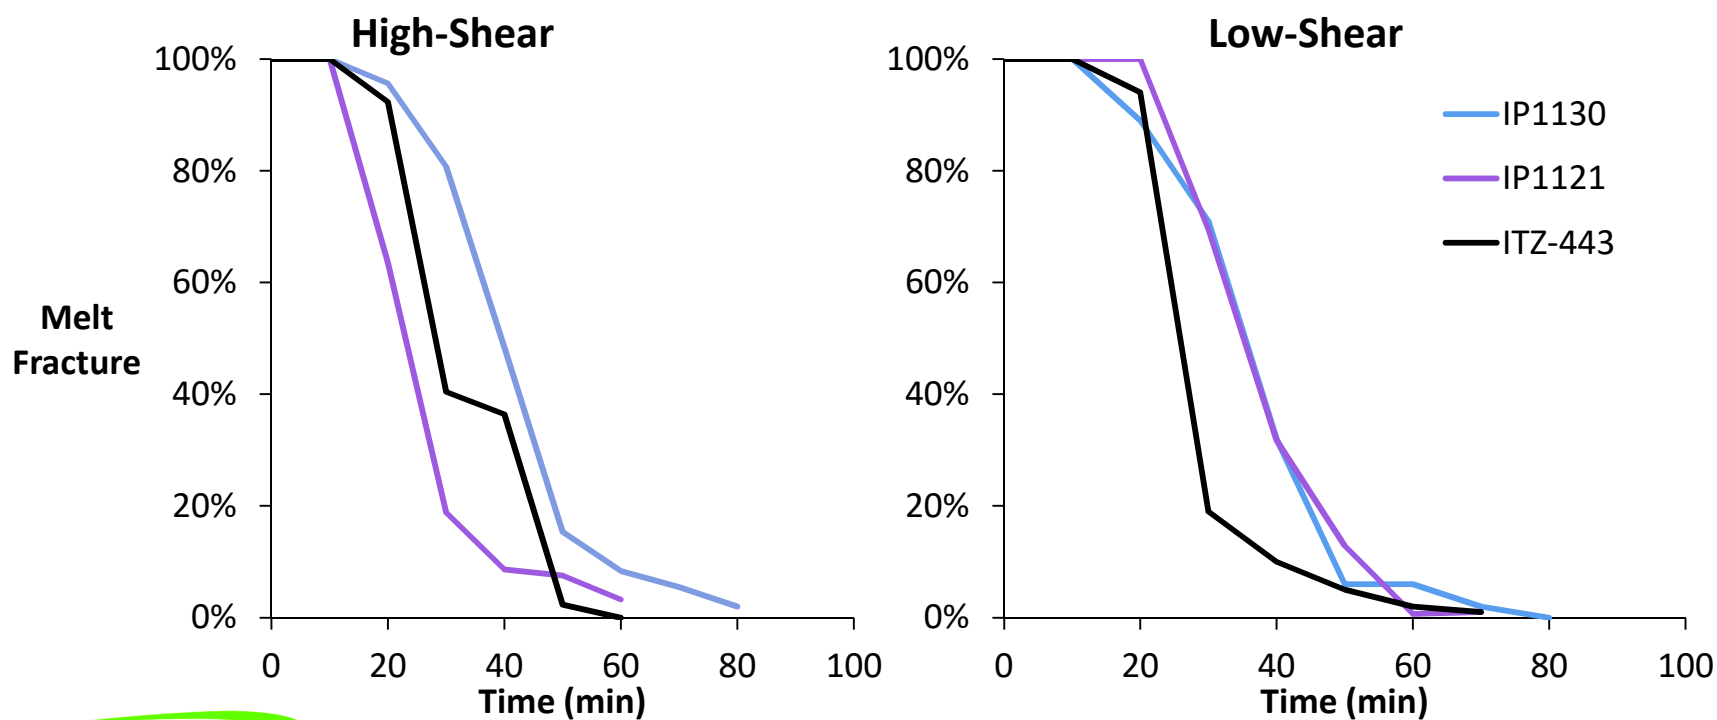

Summary

- While time-consuming, TtC melt fracture is a key test in evaluating performance of PPA masterbatches
- Good compounding & process design lead to better PPA performance
- TtC testing and other evaluations have allowed Ingenia to develop a new PPA masterbatch offering, **ITZ-443**
 - Designed to perform similarly to Ingenia's existing offerings at a better price point



©2020 Ingenia Polymers. To the extent the user is entitled to disclose and distribute this document, the user may forward, distribute, and/or photocopy this copyrighted document only if unaltered and complete, including all of its headers, footers, disclaimers, and other information. You may not copy this document to a Web site. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, suitability, accuracy, reliability, or completeness of this information or the products, materials, or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage, or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. There is no endorsement of any product or process, and we expressly disclaim any contrary implication. The terms, "we", "our", "Ingenia Polymers", or "Ingenia" are used for convenience. 'Superblend', 'Superlink', 'Rototuf', 'Rotolite' etc. are trademarks of Ingenia Polymers.